


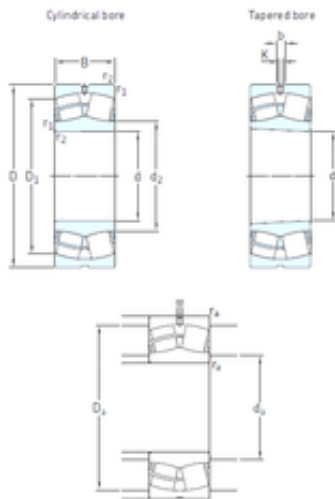

#### Bearing No. 23148CC/W33

|                               |             |
|-------------------------------|-------------|
| C                             | 128 mm      |
| B                             | 128 mm      |
| K                             | 9 mm        |
| b                             | 16,7 mm     |
| d                             | 240 mm      |
| D                             | 400 mm      |
| d2                            | 277 mm      |
| D1                            | 348 mm      |
| Weight                        | 66,5 Kg     |
| ra max.                       | 3 mm        |
| r1 min.                       | 4 mm        |
| r2 min.                       | 4 mm        |
| da min.                       | 257 mm      |
| Da max.                       | 383 mm      |
| Size (mm)                     | 240x400x128 |
| Width (mm)                    | 128         |
| Limiting speed                | 1600 r/min  |
| Bearing number                | 23148CC/W33 |
| Reference speed               | 1200 r/min  |
| Bore Diameter (mm)            | 240         |
| Outer Diameter (mm)           | 400         |
| Calculation factor (e)        | 0,3         |
| Fatigue load limit (Pu)       | 255         |
| Calculation factor (Y0)       | 2,2         |
| Calculation factor (Y1)       | 2,3         |
| Basic dynamic load rating (C) | 2080 kN     |
| Basic static load rating (C0) | 3200 kN     |