


Bearing No. HK2820

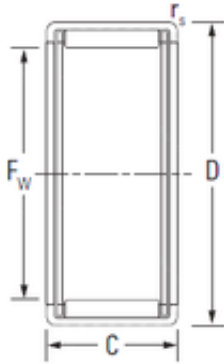

D	35 mm
C	20 mm
Cr	20.9
Fw	28 mm
Cu	5.60
C0r	35.3
Noun	Bearing
Bore	1.102 Inch 28 Millimeter
Width	0.787 Inch 20 Millimeter
UNSPSC	31171512
Weight	0.040 Kg
C3(min)	\
rs(min)	1
r5 min.	1 mm
Category	Needle Non Thrust Roller Bearing
Oil lub.	12000
Retainer	Yes
Inventory	0.0
Size (mm)	28x35x20
Separable	No
Component	Roller Assembly with Outer Ring - No Inner Ring
Enclosure	Open
Closed End	No
Width (mm)	20
Grease lub.	7500
Bearing No.	HK2820
Weight / LBS	0.088

Product Group	B04144
Inch - Metric	Metric
Self Aligning	No
Keyword String	Needle
Bearing number	HK2820
Other Features	2 Rib Outer Ring Drawn Cup Bearing Steel Cage
Thrust Bearing	No
Relubricatable	No
Rolling Element	Needle Roller Bearing
Outside Diameter	1.378 Inch 35 Millimeter
Long Description	28MM Bore; 35MM Outside Diameter; 20MM Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; No Separable; N
Manufacturer URL	http://www.koyousa.com
(Refer.)Mass(kg)	0.040
Manufacturer Name	KOYO
Weight / Kilogram	0.042
Bore Diameter (mm)	28
Outer Diameter (mm)	35
Mounting inner ring	JR22x28x20,5
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.40.00.00
Manufacturer Item Number	HK2820
Number of Rows of Rollers	Single Row

(Grease) Lubrication Speed	7500 r/min
Basic static load rating (C0)	35.3 kN
Basic dynamic load rating (C)	20.9 kN