


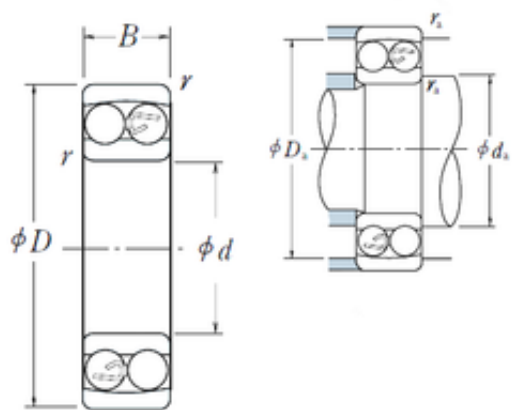

Bearing No. 2316

r	2.1
d	80 mm
D	170 mm
B	58 mm
C	58 mm
e	0.39
Y0	1.7
X1	1
B_	58
ra	2
Y2	2.5
D_	170
Y3	1.6
C0	45
X0	1
da	91
X2	0.65
PCD	125
D_a	159
SRI	13.34
SRE	0
mass	5.44
CAng	14.488
KBRG	1354
yobi	2316
SREX	0
SRIX	0.1
SRIN	0
SREN	0
r min.	2,1 mm

Weight	5,54 Kg
LangID	1
GRS rpm	3200
cyl dia	25.4
Oil rpm	4000
hidYobi	2316
da min.	91 mm
Da max.	159 mm
ra max.	2 mm
hidTable	ecat_NSSAB
cyl count	13
Size (mm)	80x170x58
Prod_Type3	SABB_SA_CB
Width (mm)	58
groove inner	99.556
groove outer	154.506
Bearing number	2316
Bore Diameter (mm)	80
Outer Diameter (mm)	170
Calculation factor (e)	0,39
(Oil) Lubrication Speed	4 000 r/min
Calculation factor (Y0)	1,7
Calculation factor (Y2)	2,5
(Grease) Lubrication Speed	3 200 r/min
Basic static load rating (C0)	45 kN
Basic dynamic load rating (C)	130 kN