


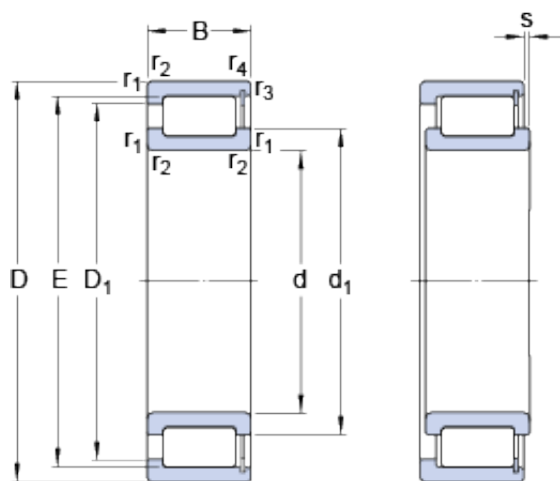

Bearing No. NCF 29/750 V

D	1000 mm
d	750 mm
B	145 mm
E	938 mm
s	11 mm
s max.	11 mm
Size (mm)	1000x750x145
Width (mm)	145
Mass bearing	313 kg
d ₁	832 mm
D ₁	918 mm
d _{as}	820 mm
Limiting speed	280 r/min
Bearing number	NCF 29/750 V
d _{as}	820 mm
Reference speed	220 r/min
r _a max.	5 mm
D _b max.	977 mm
D _a max.	977 mm
Bore Diameter (mm)	1000
d _a min.	773 mm
Outer Diameter (mm)	750
r _{1,2} min.	6 mm
D _b - max.	977 mm
r _a - max.	5 mm
r _b - max.	5 mm
Calculation factor Y	0.4
Calculation factor e	0.3
d _a - min.	773 mm
D _a - max.	977 mm

D_1 ?	918 mm
d_1 ?	832 mm
Calculation factor - Y	0.4
Calculation factor - e	0.3
$r_{1,2}$ - min.	6 mm
Basic dynamic load rating C	4460 kN
Basic dynamic load rating - C	4460 kN
Fatigue load limit P_u	710 kN
Calculation factor k_r	0.2
Calculation factor - k_r	
Fatigue load limit - P_u	710 kN
Basic static load rating C_0	10600 kN
Basic static load rating - C_0	10600 kN