


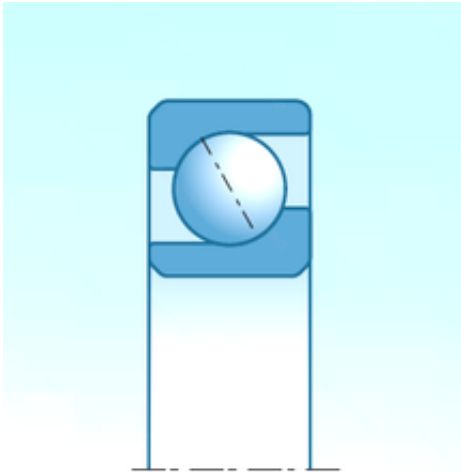

Bearing No. 7208CG/GNP4

C	18 mm
d	40 mm
B	18 mm
D	80 mm
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
Width	0.709 Inch 18 Millimeter
UNSPSC	31171531
weight:	0.362 kg
Preload	Light
Category	Precision Ball Bearings
Inventory	0.0
Size (mm)	40x80x18
Enclosure	Open
Width (mm)	18
bore type:	Round
Weight / LBS	0.798
Flush Ground	Yes
maximum rpm:	19000 rpm
closure type:	Open
Raceway Style	1 Rib Outer Ring
Cage Material	Nylon
Product Group	B04270
Inch - Metric	Metric
Contact Angle	15 Degree
Bearing number	7208CG/GNP4
fillet radius:	1.1 mm
bore diameter:	40 mm
overall width:	18 mm

Keyword String	Angular Contact Ball
Other Features	Single Row Angular Contact
cage material:	Nylon
contact angle:	15 °
Angle (?)	15 °
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 7 ISO P4
Material - Ball	Steel
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearings; 15 Degree Contact Angle; Nylon Cage Material; 1 Rib Outer Ring Racewa
Outside Diameter	3.15 Inch 80 Millimeter
Manufacturer URL	http://www.ntnamerica.com
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
precision rating:	ISO Class 4
Weight / Kilogram	0.362
outside diameter:	80 mm
Number of Bearings	1 (Single)
Bore Diameter (mm)	40
Outer Diameter (mm)	80
snap ring included:	Without Snap Ring
Mounting Arrangement	Universal
Minimum Buy Quantity	N/A
row type & fill slot:	Single-Row Non-Fill Slot

Harmonized Tariff Code	8482.10.50.28
Manufacturer Item Number	7208CG/GNP4
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
radial static load capacity:	25200 N
radial dynamic load capacity:	36500 N