




Bearing No. 7215B

D	130 mm
d	75 mm
B	25 mm
C	25 mm
a	55.5 mm
Cu	3.65
Cr	93.6
f0	-
C0r	63.3
Noun	Bearing
Bore	2.953 Inch 75 Millimeter
a(mm)	55.5
Width	0.984 Inch 25 Millimeter
Weight	1.23 Kg
r min.	1.5 mm
UNSPSC	31171531
r(min)	1.5
da(min)	83.5
r1 min.	1 mm
Da max.	121.5 mm
r1(min)	1
Da(max)	121.5
ra max.	1.5 mm
ra(max)	1.5
da min.	83.5 mm
Category	Angular Contact Ball Bearing
Oil lub.	4600
Inventory	0.0

Enclosure	Open
Size (mm)	75x130x25
Snap Ring	No
Width (mm)	25
Bearing No.	7215B
Grease lub.	3400
Flush Ground	No
Contact Angle	40 Degree
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7215B
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Angle (?)	40 °
(Refer.)Mass(kg)	1.23
Outside Diameter	5.118 Inch 130 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	75MM Bore; 130MM Outside Diameter; 25MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 40 Degree; 1 (Single)
Weight / Kilogram	0
Manufacturer Name	KOYO
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Bore Diameter (mm)	75

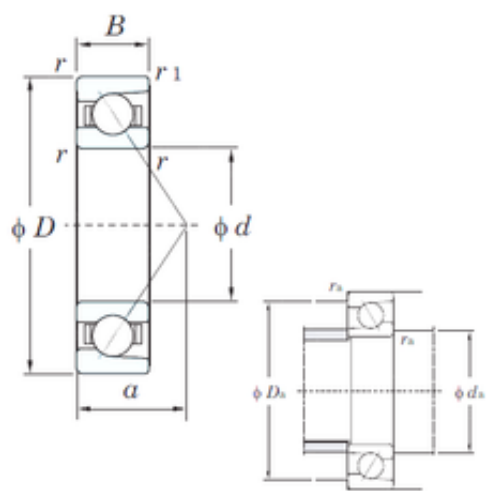

Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	4300 r/min
Maximum Capacity / Filling Slot	No