


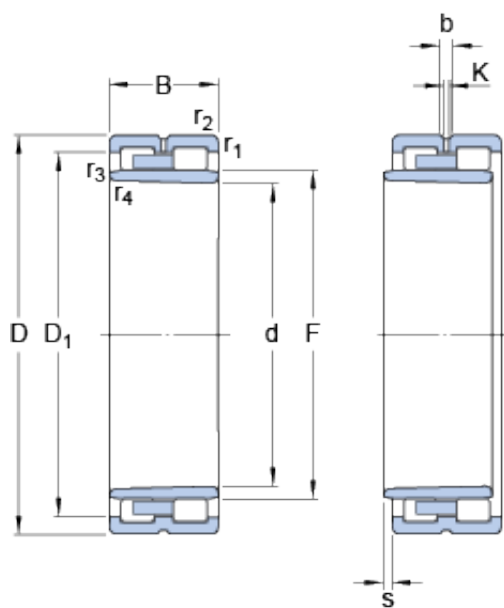

Bearing No. NNU 4972 BK/SPW33

s	5.5 mm
d	360 mm
D	480 mm
B	118 mm
F	399 mm
b	16.7 mm
K	9 mm
s max.	5.5 mm
Size (mm)	360x480x118
Width (mm)	118
Mass bearing	55 kg
D ₁	439 mm
D ₁	439 mm
Bearing number	NNU 4972 BK/SPW33
D _a max.	467 mm
r _a max.	2.5 mm
d _a max.	395 mm
d _a min.	373 mm
Bore Diameter (mm)	360
Outer Diameter (mm)	480
r _{3,4} min.	1.5 mm
d _a - min.	373 mm
d _a - max.	395 mm
D _a - max.	467 mm
r _a - max.	2.5 mm
r _{1,2} min.	3 mm
r _{3,4} - min.	1.5 mm
r _{1,2} - min.	3 mm
Basic dynamic load rating C	1120 kN

Basic dynamic load rating - C	1120 kN
Fatigue load limit P_u	255 kN
Limiting speed for oil lubrication	1700 r/min
Fatigue load limit - P_u	255 kN
Limiting speed for grease lubrication	1500 r/min
Basic static load rating C_0	2800 kN
Attainable speed for grease lubrication	1500 r/min
Basic static load rating - C_0	2800 kN
Attainable speed for oil-air lubrication	1700 r/min