


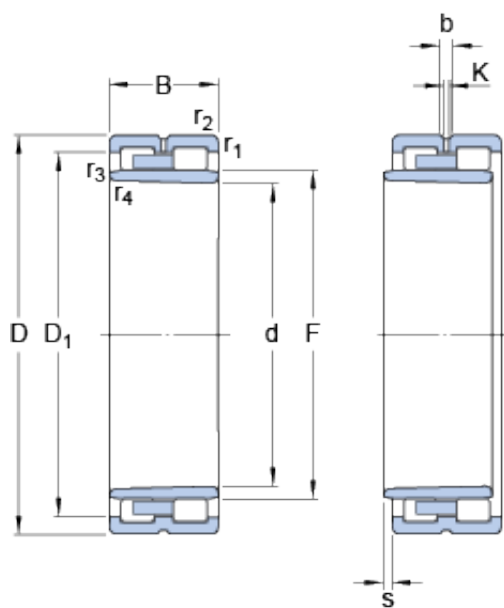

Bearing No. NNU 4976 BK/SPW33

s	5.5 mm
d	380 mm
D	520 mm
B	140 mm
F	426 mm
b	16.7 mm
K	9 mm
s max.	5.5 mm
Size (mm)	380x520x140
Width (mm)	140
Mass bearing	83.5 kg
D ₁	470.8 mm
D ₁	470.8 mm
Bearing number	NNU 4976 BK/SPW33
D _a max.	505 mm
r _a max.	3 mm
d _a max.	421 mm
d _a min.	395 mm
Bore Diameter (mm)	380
Outer Diameter (mm)	520
r _{3,4} min.	2.5 mm
d _a - min.	395 mm
d _a - max.	421 mm
D _a - max.	505 mm
r _a - max.	3 mm
r _{1,2} min.	4 mm
r _{3,4} - min.	2.5 mm
r _{1,2} - min.	4 mm
Basic dynamic load rating C	1450 kN

Basic dynamic load rating - C	1450 kN
Fatigue load limit P_u	320 kN
Limiting speed for oil lubrication	1500 r/min
Fatigue load limit - P_u	320 kN
Limiting speed for grease lubrication	1300 r/min
Basic static load rating C_0	3600 kN
Attainable speed for grease lubrication	1300 r/min
Basic static load rating - C_0	3600 kN
Attainable speed for oil-air lubrication	1500 r/min