




Bearing No. 7309B

a	43.1 mm
d	45 mm
D	100 mm
B	25 mm
C	25 mm
Cr	67.0
f0	-
Cu	2.40
C0r	37.2
Noun	Bearing
Bore	1.772 Inch 45 Millimeter
Width	0.984 Inch 25 Millimeter
a(mm)	43.1
UNSPSC	31171531
r(min)	1.5
r min.	1.5 mm
Weight	0.875 Kg
da min.	53.5 mm
ra(max)	1.5
ra max.	1.5 mm
r1 min.	1 mm
Da max.	91.5 mm
da(min)	53.5
r1(min)	1
Da(max)	91.5
Category	Angular Contact Ball Bearing
Oil lub.	6500
Snap Ring	No

Enclosure	Open
Size (mm)	45x100x25
Inventory	0.0
Width (mm)	25
Bearing No.	7309B
Grease lub.	4900
Flush Ground	No
Contact Angle	40 Degree
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7309B
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Angle (?)	40 °
(Refer.)Mass(kg)	0.875
Outside Diameter	3.937 Inch 100 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	45MM Bore; 100MM Outside Diameter; 25MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 40 Degree; 1 (Single)
Weight / Kilogram	0
Manufacturer Name	KOYO
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Bore Diameter (mm)	45

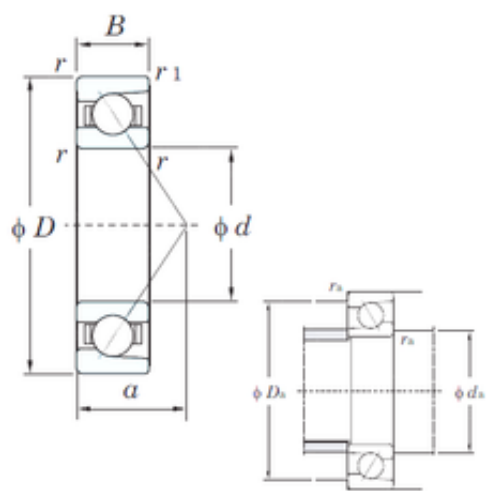

Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	6200 r/min
Maximum Capacity / Filling Slot	No