


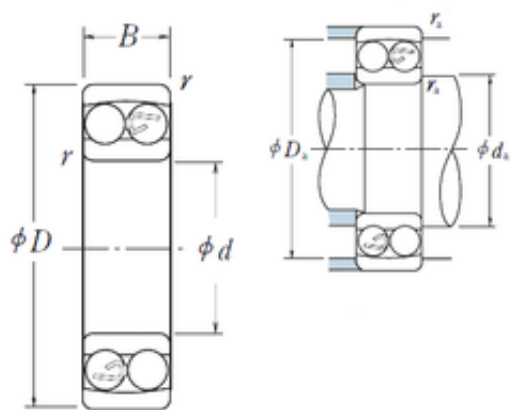

Bearing No. 1219

r	2.1
d	95 mm
D	170 mm
B	32 mm
C	32 mm
e	0.17
Y0	3.9
X1	1
B_	32
ra	2
Y2	5.8
D_	170
Y3	3.7
C0	27.1
X0	1
da	106
X2	0.65
PCD	133.5
D_a	159
SRI	8.75
SRE	0
mass	3.21
CAng	6.411
KBRG	1352
yobi	1219
SREX	0
SRIX	0.065
SRIN	0
SREN	0
r min.	2,1 mm

Weight	3,21 Kg
LangID	1
GRS rpm	3400
cyl dia	16.669
Oil rpm	4000
hidYobi	1219
da min.	106 mm
Da max.	159 mm
ra max.	2 mm
hidTable	ecat_NSSAB
cyl count	20
Size (mm)	95x170x32
Prod_Type3	SABB_SA_CB
Width (mm)	32
groove inner	116.825
groove outer	151.009
Bearing number	1219
Bore Diameter (mm)	95
Outer Diameter (mm)	170
Calculation factor (e)	0,17
(Oil) Lubrication Speed	4 000 r/min
Calculation factor (Y0)	3,9
Calculation factor (Y2)	5,8
(Grease) Lubrication Speed	3 400 r/min
Basic static load rating (C0)	27,1 kN
Basic dynamic load rating (C)	64 kN