


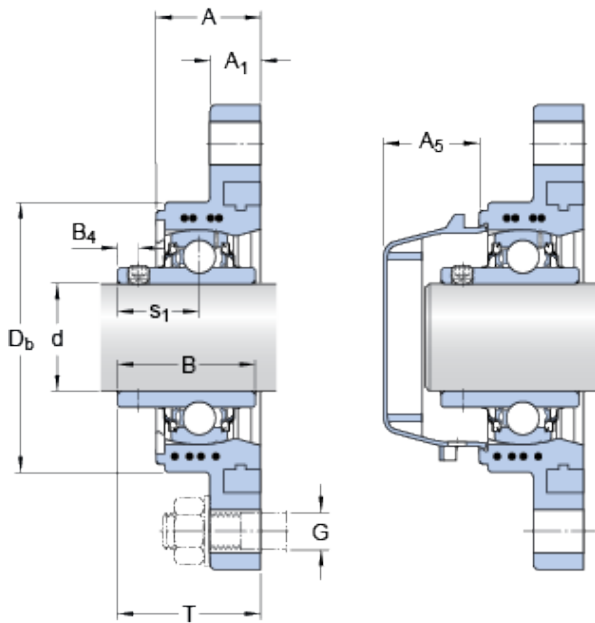

Bearing No. FYTWK 1.3/16 YTA

B	38.1 mm
T	42.2 mm
N	12.3 mm
L	83 mm
d	30.163 mm
A	33 mm
H	12.3 mm
J	116.5 mm
Bearing	YAR 206-103-2RF/VE495
Size (mm)	30.163x33x15
Width (mm)	15
Db	78 mm
Db	78 mm
A5	30.5 mm
A1	15 mm
S1	22.2 mm
S1	22.2 mm
B4	5 mm
A5	30.5 mm
A1	15 mm
B4	5 mm
Bearing number	FYTWK 1.3/16 YTA
Limiting speed	3800 r/min
Housing material	Composite for food and beverage
Mass bearing unit	0.46 kg
Bore Diameter (mm)	30,163
Outer Diameter (mm)	33
Basic dynamic load	19.5 kN

rating C	
Basic dynamic load rating - C	19.5 kN
Thread grub screw G ₂	1/4-28 UNF
Fatigue load limit P _u	0.475 kN
Fatigue load limit - P _u	0.475 kN
Hexagonal key size for grub screw N	3.175 mm
Thread - G ₂ - 1/4-28 UNF	1/4-28 UNF
Hexagonal key size for grub screw - H	3.175 mm
Basic static load rating C ₀	11.2 kN
Basic static load rating - C ₀	11.2 kN
Recommended tightening torque for grub screw	4 N·m
Recommended diameter for attachment bolts, mm G	10 mm
Recommended diameter for attachment bolts, inch G	0.375 in