


Bearing No. RASE50-N

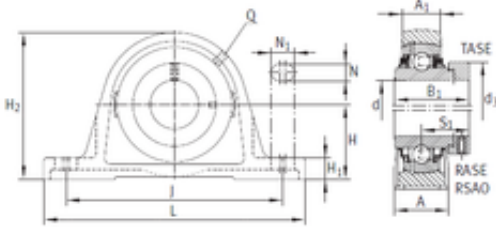

N	18 mm
d	50 mm
A	54 mm
H	57,2 mm
J	158 mm
L	200 mm
N1	23 mm
S1	38,2 mm
d3	69 mm
A1	34 mm
B1	62,8 mm
H1	21,5 mm
H2	115 mm
Noun	Bearing
Bore	1.969 Inch 50 Millimeter
Seals	Double Land Riding Rubber Contact
UNSPSC	31171511
Weight	2,8 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	7.056
Product Group	M06110
Housing Style	2 Bolt Pillow Block
Inch - Metric	Metric
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Standard Shaft Height With Set

	Screw
Bearing number	RASE50-N
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Length Thru Bore	2.469 Inch 62.7 Millimeter
Manufacturer URL	http://www.ina.com
Housing Material	Cast Iron
Long Description	2 Bolt Pillow Block; 50MM Bore; 57.2MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 151.5MM Minimum Bolt Spacing; 163.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land R
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	0
Bore Diameter (mm)	50
Insert Part Number	GE50KRRB
Bolt Spacing Minimum	5.965 Inch 151.5Millimeter
Bolt Spacing Maximum	6.437 Inch 163.5Millimeter
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Base to Center Height	2.252 Inch 57.2 Millimeter
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RASE50N
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion

Actual Bolt Center to Center	0 Inch 0Millimeter
Basic dynamic load rating (C)	35 kN
Nominal Bolt Center to Center	6.3 Inch 160 Millimeter