


Bearing No. RASEA30-N

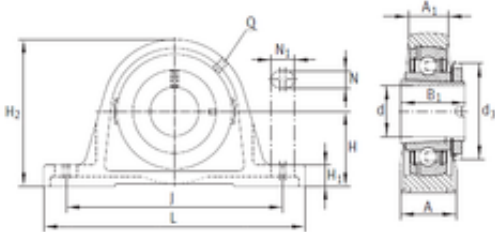

d	30 mm
A	40 mm
H	42,9 mm
J	118 mm
L	158 mm
N	14 mm
N1	22 mm
d3	45 mm
A1	25 mm
B1	32 mm
H1	17 mm
H2	82 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
Seals	Double Land Riding Rubber Contact
UNSPSC	31171511
Weight	1 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	2.205
Product Group	M06110
Housing Style	2 Bolt Pillow Block
Inch - Metric	Metric
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Radial Standard Shaft Height Metric

Bearing number	RASEA30-N
Mounting Method	Adapter Sleeve
Rolling Element	Ball Bearing
Manufacturer URL	http://www.ina.com
Housing Material	Cast Iron
Length Thru Bore	1.26 Inch 32 Millimeter
Long Description	2 Bolt Pillow Block; 30MM Bore; 43MM Base to Center Height; Adapter Sleeve Mount; Ball Bearing; 110MM Minimum Bolt Spacing; 126MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Land Riding Ru
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	0.004
Bore Diameter (mm)	30
Insert Part Number	GSH30RRB
Bolt Spacing Minimum	4.331 Inch 110Millimeter
Bolt Spacing Maximum	4.961 Inch 126Millimeter
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Base to Center Height	1.693 Inch 43 Millimeter
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RASEA30
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Nominal Bolt Center to Center	4.6 Inch 118 Millimeter

Basic dynamic load rating (C)	18,9 kN
-------------------------------	---------