


Bearing No. RASEL40-N

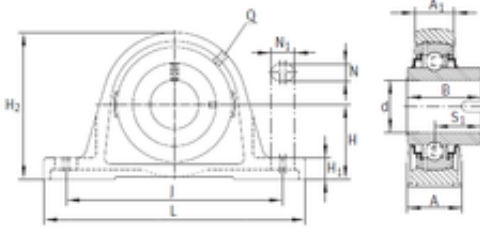

N	14 mm
d	40 mm
A	48 mm
B	42,9 mm
H	49,2 mm
J	138 mm
L	179 mm
N1	26 mm
S1	27 mm
A1	30 mm
H1	19 mm
H2	99 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
Seals	Double Land Riding Rubber Contact
Weight	1,79 Kg
UNSPSC	31171511
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	4.631
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Pillow Block
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Radial Non Locating Bearing Metric

Bearing number	RASEL40-N
Mounting Method	Drive Slot
Rolling Element	Ball Bearing
Manufacturer URL	http://www.ina.com
Long Description	2 Bolt Pillow Block; 40MM Bore; 49.2MM Base to Center Height; Drive Slot Mount; Ball Bearing; 125MM Minimum Bolt Spacing; 147MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Land Riding Rubb
Length Thru Bore	2.217 Inch 56.3 Millimeter
Housing Material	Cast Iron
Weight / Kilogram	2.036
Manufacturer Name	SCHAEFFLER GROUP
Insert Part Number	GLE40KRRB
Bore Diameter (mm)	40
Bolt Spacing Minimum	4.921 Inch 125Millimeter
Bolt Spacing Maximum	5.787 Inch 147Millimeter
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Base to Center Height	1.937 Inch 49.2 Millimeter
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RASEL40
Number of Mounting Holes	2
Expansion / Non- expansion	Expansion
Basic dynamic load	32,5 kN

rating (C)	
Nominal Bolt Center to Center	5.4 Inch 136 Millimeter