


Bearing No. RASEL45

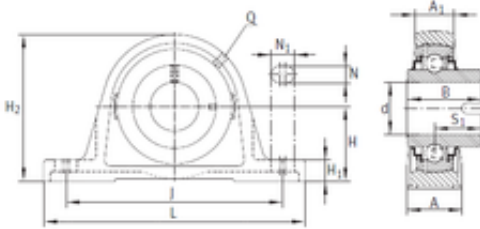

N	14 mm
d	45 mm
A	48 mm
B	42,9 mm
H	54 mm
J	150 mm
L	192 mm
N1	29 mm
S1	25,5 mm
A1	32 mm
H1	21,5 mm
H2	107 mm
Noun	Bearing
Bore	1.772 Inch 45 Millimeter
Seals	Double Land Riding Rubber Contact
UNSPSC	31171511
Weight	2,1 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	5.292
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Pillow Block
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Non Locating Bearing
Bearing number	RASEL45

Mounting Method	Drive Slot
Rolling Element	Ball Bearing
Length Thru Bore	2.217 Inch 56.3 Millimeter
Manufacturer URL	http://www.ina.com
Long Description	2 Bolt Pillow Block; 45MM Bore; 54MM Base to Center Height; Drive Slot Mount; Ball Bearing; 136.5MM Minimum Bolt Spacing; 160.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding Ru
Housing Material	Cast Iron
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	2.4
Insert Part Number	GLE45KRRB
Bore Diameter (mm)	45
Bolt Spacing Minimum	5.374 Inch 136.5Millimeter
Bolt Spacing Maximum	6.319 Inch 160.5Millimeter
Minimum Buy Quantity	N/A
Base to Center Height	2.126 Inch 54 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RASEL45
Number of Mounting Holes	2
Expansion / Non- expansion	Expansion
Actual Bolt Center to Center	0 Inch 0Millimeter

Nominal Bolt Center to Center	5.8 Inch 146.5 Millimeter
Basic dynamic load rating (C)	32,5 kN