




Bearing No. NKIA5908

D	62 mm
d	40 mm
B	30 mm
F	48 mm
m	315 g / Weight
Noun	Bearing
Height	1.181 Inch 30 Millimeter
Bore 1	1.575 Inch 40 Millimeter
Bore 2	1.575 Inch 40 Millimeter
Banded	No
UNSPSC	31171537
Category	Thrust Roller Bearings
Inventory	0.0
Size (mm)	40x62x30
Width (mm)	30
Weight / LBS	0.695
Inch - Metric	Metric
Cage Material	Steel
Self Aligning	No
Product Group	B04144
C _a	9200 N / Dynamic load rating (axial)
n _G	9600 1/min / Limiting speed
C _r	48500 N / Dynamic load rating (radial)
C _{ur}	11500 N / Fatigue limit load, radial
Keyword String	Combination

C_{0r}	67000 N / Static load rating (radial)
C_{0a}	19400 N / Static load rating (axial)
Bearing number	NKIA5908
C_{ua}	860 N / Fatigue limit load, axial
Thrust Bearing	Yes
Precision Class	ABEC 1 ISO P0
r_{min}	0,6 mm
Rolling Element	Combination - Needle Roller and Thrust Ball Bearing
Outside Diameter	2.441 Inch 62 Millimeter
Long Description	40MM Bore 1; 40MM Bore 2; 62MM Outside Diameter; 30MM Height; Combination - Needle Roller and Thrust Ball Bearing; Single Direction; Not Self Aligning; Not Banded; Steel Cage; ABEC 1 ISO P0; Roller
Manufacturer URL	http://www.ina.com
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	0.32
Bore Diameter (mm)	40
Outer Diameter (mm)	62
Minimum Buy Quantity	N/A
Component Description	Roller Assembly plus Raceways
Harmonized Tariff Code	8482.80.00.40
Manufacturer Item Number	NKIA5908
Single or Double	Single Direction

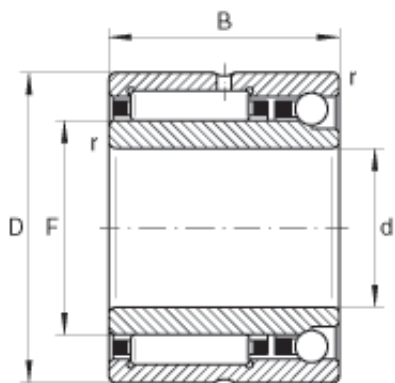

Direction	
Overall Height with Aligning Washer	0 Inch 0 Millimeter