


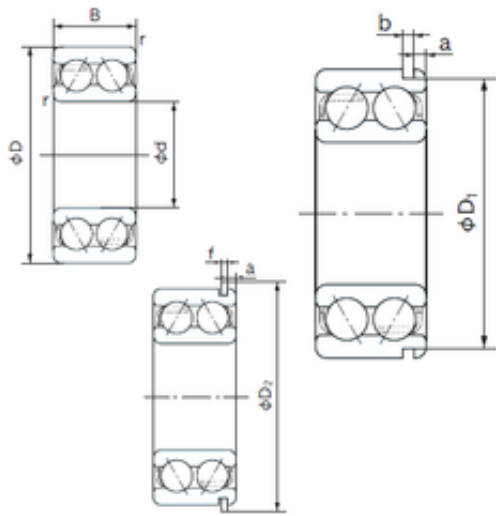

Bearing No. 5313NR

b	3.1 mm
f	2.82 mm
d	65 mm
D	140 mm
B	58.7 mm
C	58.7 mm
a	4.9 mm
da	77 mm
D2	149.7 mm
D1	135.23 mm
Cy	7.4 mm
Da	128 mm
Dx	152 mm
ra	2 mm
Width	58.7 mm
r min.	2.1 mm
Weight	3.86 Kg
a (max)	4.9 mm
Bore Type	Cylindrical Bore
Bore Size	65 mm
Enclosure	Snap Ring Groove with Snap Ring
Size (mm)	65x140x58.7
Width (mm)	58.7
Configuration	Double Row
Bearing number	5313NR
Snap Ring Width	2.8 mm
Radial Clearance	0.008 to 0.028 mm
Outside Diameter	140 mm
Bore Diameter (mm)	65

Static Load Rating	115,000 N
Dynamic Load Rating	145,000 N
Outer Diameter (mm)	140
Limiting Speed - Oil	4,700 rpm
Fillet Radius/Chamfer	2.1 mm
Limiting Speed - Grease	3,600 rpm
Snap Ring Outside Diameter	149.7 mm
(Grease) Lubrication Speed	3600 r/min
Basic static load rating (C0)	115 kN
Basic dynamic load rating (C)	145 kN