


Bearing No. TASE25-N

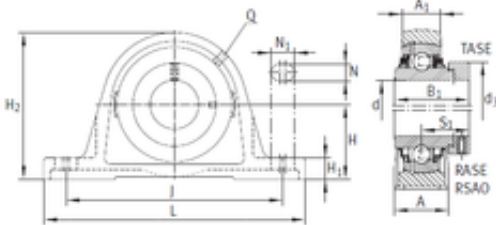

N	11 mm
d	25 mm
A	36 mm
H	36,5 mm
J	103 mm
L	130 mm
N1	19 mm
S1	27 mm
d3	37,5 mm
A1	21 mm
B1	44,5 mm
H1	14,5 mm
H2	70 mm
Noun	Bearing
Bore	0.984 Inch 25 Millimeter
Seals	Double Triply
Weight	0,75 Kg
UNSPSC	31171511
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	1.985
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Pillow Block
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Radial Standard Shaft Height Metric With Set Screw

Bearing number	TASE25-N
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Manufacturer URL	http://www.ina.com
Long Description	2 Bolt Pillow Block; 25MM Bore; 36.5MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 95.3MM Minimum Bolt Spacing; 114.3MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Triply;
Length Thru Bore	1.748 Inch 44.4 Millimeter
Housing Material	Cast Iron
Weight / Kilogram	0.874
Manufacturer Name	SCHAEFFLER GROUP
Insert Part Number	GE25KPPB3
Bore Diameter (mm)	25
Bolt Spacing Minimum	3.752 Inch 95.3Millimeter
Bolt Spacing Maximum	4.5 Inch 114.3Millimeter
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Base to Center Height	1.437 Inch 36.5 Millimeter
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	TASE25
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Basic dynamic load rating (C)	14 kN

Nominal Bolt Center to Center	4.1 Inch 105 Millimeter
-------------------------------	---------------------------