


Bearing No. TASE60-N

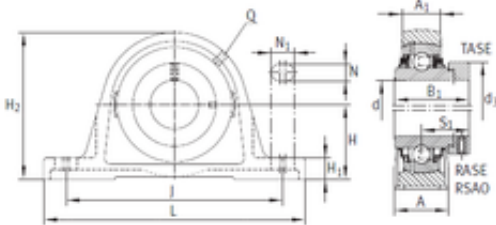

N	18 mm
d	60 mm
A	60 mm
H	69,9 mm
J	190 mm
L	240 mm
N1	28 mm
S1	46,8 mm
d3	84 mm
A1	42 mm
B1	77,9 mm
H1	25 mm
H2	140 mm
Noun	Bearing
Bore	2.362 Inch 60 Millimeter
Seals	Double Triply
UNSPSC	31171511
Weight	4,77 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	12.348
Product Group	M06110
Housing Style	2 Bolt Pillow Block
Inch - Metric	Metric
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Radial Standard Shaft Height Metric With Set Screw

Bearing number	TASE60-N
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Length Thru Bore	3.063 Inch 77.8 Millimeter
Manufacturer URL	http://www.ina.com
Housing Material	Cast Iron
Long Description	2 Bolt Pillow Block; 60MM Bore; 70MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 177MM Minimum Bolt Spacing; 201.5MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Triply; No
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	5.61
Bore Diameter (mm)	60
Insert Part Number	GE60KPPB3
Bolt Spacing Minimum	6.969 Inch 177Millimeter
Bolt Spacing Maximum	7.933 Inch 201.5Millimeter
Minimum Buy Quantity	N/A
Base to Center Height	2.756 Inch 70 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	TASE60
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Nominal Bolt Center to	7.5 Inch 190 Millimeter

Center	
Basic dynamic load rating (C)	52 kN